



1. Mechanical Dimensions:

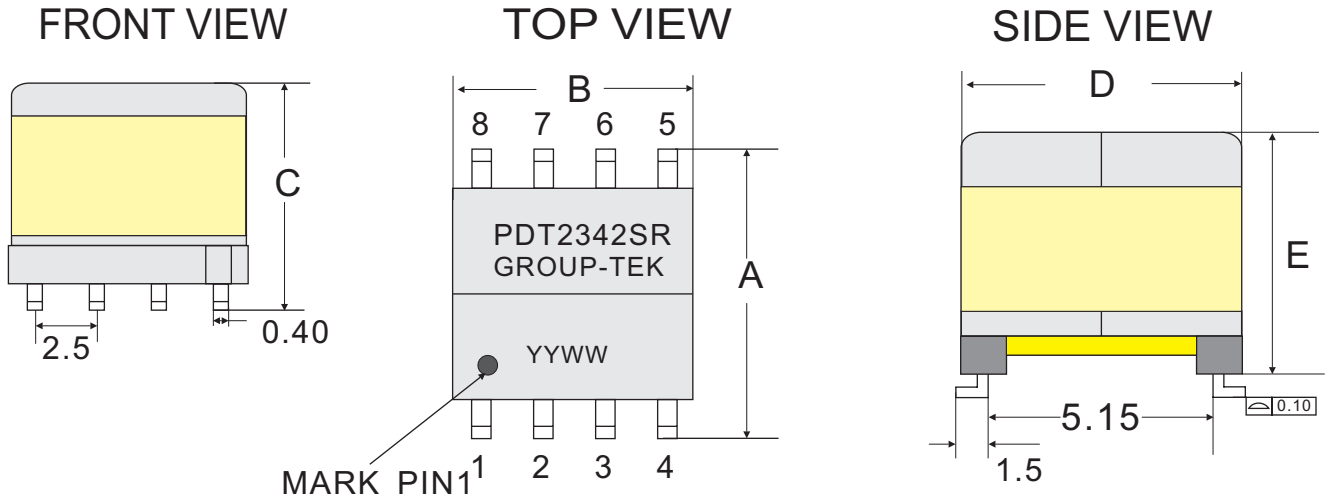

2. Schematic:

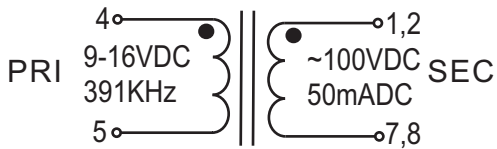

Unit: mm

| A | B | C | D | E |
|------|------|------|------|------|
| ±0.5 | ±0.5 | ±0.5 | ±0.5 | ±0.5 |
| 8.5 | 9.5 | 10.5 | 8.0 | 9.6 |

3. Electrical Characteristics :

Specifications: at 25 degree C. Operating Temperature -40 to +85°C

| NO. | ITEM | TEST CONDITION | SPECIFICATION |
|-----|------------|----------------------------|-------------------|
| 1 | Inductance | (4-5)@100kHz, 0.1Vac | 2.7uH+/-10% |
| 2 | DCR | (4-5) @ 25°C | 0.015 Ω Max |
| 3 | | (1,2-7,8) @ 25°C | 0.35 Ω Max |
| 4 | HI-POT | (PRI TO SEC) | 625Vac 1.0mA 1Sec |
| 5 | T/R | (1-8):(4-5) TIED (1+2,7+8) | 4 : 1±2% |
| 6 | | (1-8):(2-7) | 1 : 1±2% |