

### BALUN TRANSFORMER




#### Features:

- For wideband RF applications.
- Excellent insertion loss.
- Impedance 50Ω:50Ω.
- Designed for IR reflow up to 260°C.
- Storage temperature -25°C to +125°C.
- RoHS compliance

#### Electrical Specifications: at 25°C, Operating Temperature 0°C to +70°C

Part NO	Turn Ratio Pri:Sec	Insertion Loss (Pin6-Pin1) (dB) [MIN] MHz			DCR (Ohm Max.)		Lp (uH Min)	LL (uH Max)	Cww (pF Max)
		5-50	50-150	150-200	1-3	4-6	1-3	1-4	6-1
RFT092R	6:3:3	-0.8	-2.5	-3.6	0.25	0.25	35.0	0.25	5.0

Dimension:mm(inch), Unless otherwise specified , all tolerance are+/-0.25(0.01)

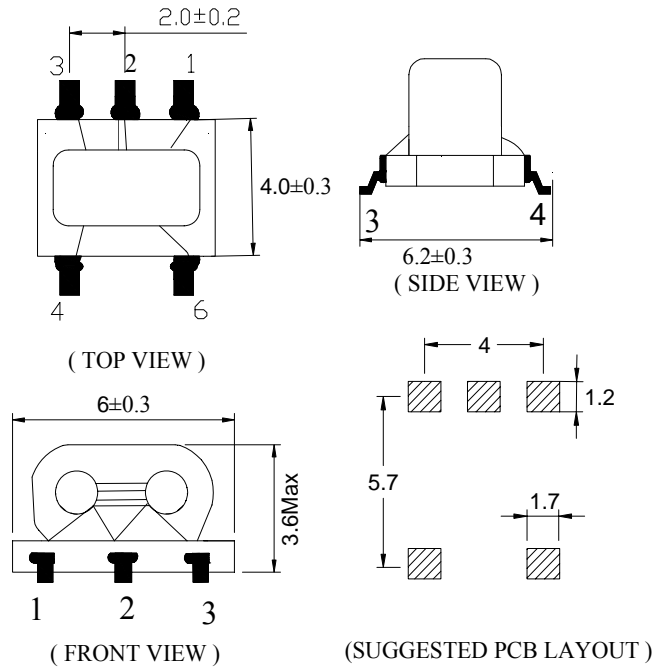

#### Schematic:

