

### BALUN TRANSFORMER




**Features:**

- For wideband RF applications.
- Excellent insertion loss.
- Storage temperature -40°C to +125°C.
- RoHS compliance

**Electrical Specifications: at 25°C, Operating Temperature -40°C to +85°C**

Part NO	Turn Ratio (1-2) : (2-3)	DCR (Ohm Max.)		Lp (uH TYP.) 100kHz 0.1V	
		1-2	2-3	1-2	2-3
RFT096AR	3T:4T	0.25	0.25	2.7	4.8

Dimension:mm(inch), Unless otherwise specified , all tolerance are+/-0.25(0.01)

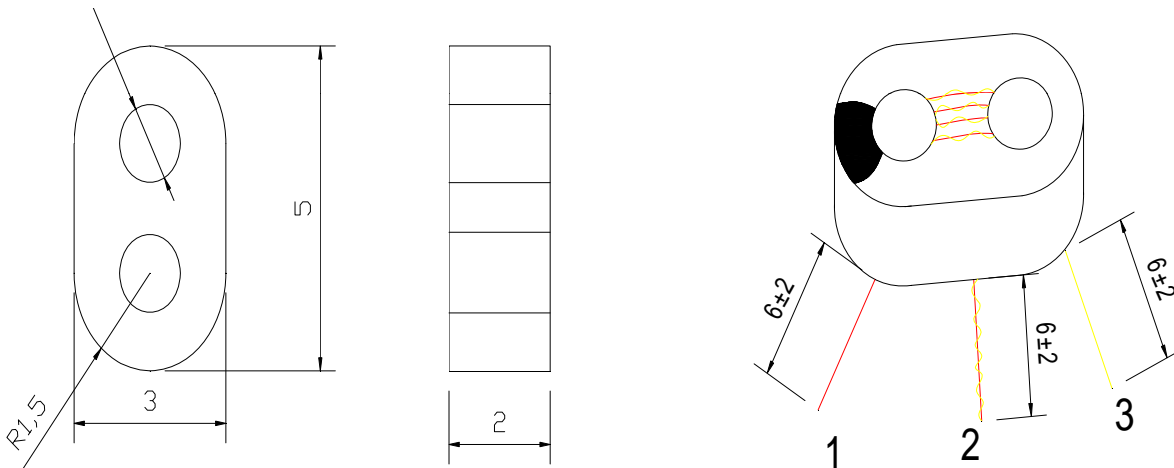

**Schematic:**

Note:浸锡留线皮长度 1.2mm Max.

